



DELIVER EXTREMELY CLEAN WATER TO YOUR CRITICAL PROCESS EQUIPMENT

UltraPure Systems Vista Reverse Osmosis Systems are completely contained in a sleek industrial grade cabinet with single point connections for ease of installation and placement virtually anywhere. Each unit has an integral 4-stage process to remove harmful substances, such as heavy metal ions and total dissolved solids from domestic water sources. This purification process will convert municipal water to a consistently higher purity level, suitable for multiple types of humidifiers and other equipment.

Neatly packed in a sturdy 1/2" welded high density polyethylene plastic cabinet with a hinged door makes this single point connection system ideal for small reverse osmosis applications. With our advanced system controller you can monitor City PPM and RO water quality at a glance via the highly visible blue and red illumination on the front of the cabinet. BLUE indicating proper water quality and RED indicating an alarm condition, such as water quality no longer being within acceptable range. Serving AND protecting your process and equipment investment.

Maintain and optimize your system's performance with our unique Query Code System. As a standard part of every system, this simple, friendly, powerful, no cost mobile application enables customers to manage routine filter maintenance from anywhere, including on-site or remotely.

BENEFITS

- Eliminate down time due to consumed filters (proactive vs. reactive)
- Stay ahead of the curve with automatically generated email notifications
- Predictable data budgeting on annual filter costs
- No binding contracts or licensing fees required

System Summary -Vista 200

3 Stage reverse osmosis process. The final purity of the water leaving the reverse osmosis system is depended on incoming water however once water levels exceed 150ppm reverse osmosis membrane should be replaced. This Systems flow is rated at **200 gpd** +/- 15% based on 77 degree water, 100 psi applied pressure. 500 ppm NaCl softened filtered water.

Feed Pressure	Operating Temperature	Electrical Rating	Amp Max	Dry Weight	Total Weight
35-125 psi	34 - 110° F	120 VAC/60Hz	MFS 15	85lbs	125lbs

Stage 1 : Sediment Filter

Engineered to expanded volume and higher flow rates for commercial applications such as equipment protection and water polishing. Each filter is pretested for maximum pressure and temperature.

Quantity Per Unit	1
Model Number	UPF_4289
Filter Dimensions	3.125" OD x 2.875" ID x 10" L
Rating	5 Micron
Max Operating Pressure	125 PSI
Operating Temperature	40 - 100F

Features and Benefits:



- Protect equipment from hard water
- Large 3.5" W x 10" or 15" lengths
- Capacities of up to 20,000 gallons
- Hefty flow rates up to 2 gal/min
- Two piece bayonet style replacement
- Best cost to performance ratio in the industry

Test Information: Housings and fittings have been tested for performance to NSF Standard 42. Tests included Hyrdo Static Testing at 300 psig and Cycle Testing of 100,000 repetitions from 0 to 150 psig. Filters have been tested and listed under Standard 42 for odor, and chlorine reduction; or particulate reduction; or have been materials certified. All filters should be installed on cold water lines. **Note:** Activated carbon filters are not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit.

Warranty Information: Filters are warrantied to be free from any defects in workmanship or materials. Further, the warranty provided applies, only when used with the product specifications and service life, from the date of install or 5 years from the date of manufacture whichever occurs first, beyond which time or use Ultra Pure Systems is not liable for any use of this product.

Stage 2 : Carbon Filters

Engineered to expanded volume and higher flow rates for commercial applications such as equipment protection and water polishing. Each filter is pretested for maximum pressure and temperature.

Quantity Per Unit	2
Model Number	UPF_4290
Filter Dimensions	3.125" OD x 2.875" ID x 10" L
Rating	10 Micron
Max Operating Pressure	125 PSI
Operating Temperature	40 - 100F

Features and Benefits:



- Protect equipment from hard water
- Large 3.5" W x 10" or 15" lengths
- Capacities of up to 20,000 gallons
- Hefty flow rates up to 2 gal/min
- Two piece bayonet style replacement
- Best cost to performance ratio in the industry

Test Information: Housings and fittings have been tested for performance to NSF Standard 42. Tests included Hyrdo Static Testing at 300 psig and Cycle Testing of 100,000 repetitions from 0 to 150 psig. Filters have been tested and listed under Standard 42 for odor, and chlorine reduction; or particulate reduction; or have been materials certified. All filters should be installed on cold water lines. **Note:** Activated carbon filters are not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit.

Warranty Information: Filters are warranted to be free from any defects in workmanship or materials. Further, the warranty provided applies, only when used with the product specifications and service life, from the date of install or 5 years from the date of manufacture whichever occurs first, beyond which time or use Ultra Pure Systems is not liable for any use of this product.

Stage 3 : Membrane Filter

(2) 100GPD encapsulated RO membrane manufactured within an ISO:9001 semi-automated manufacturing facility and meet all performance and quality standards. Encapsulated high 1:1 ratio which means less waste.

Quantity Per Unit	2
Model Number	UPF_5293
Filter Dimensions	.87" x 2.60" x 11.73" L
pH Range	4 - 11
Max Operating Pressure	125 PSI
Operating Temperature	40 - 120F

Features and Benefits:



- Thin layer composite membrane
- High rejection stability at high TDS input
- Double the recovery over standard RO elements
- 100% dry membrane maximizing shelf life
- Eligible for NSF data transfer
- Industry best 1:1 rejection rate

Test Information: The thin layer composite membrane filters have been tested for performance to NSF Standard 42. Filters and membrane elements are not to be installed on microbiologically unsafe water supplies. TLC Membranes are not certified to sanitize water, remove cysts, bacteria or viruses. Filters and membrane element performance can be affected by flucuations in warter quality.

Additional System Components

Optional UV Sterilizer

Optional UV Sterilizer can be added to each system. Water will pass through UV light as a last pass prior to going into water storage tank. UV Sterilizer is sized for system nominal capacity and prewired integral of system. Blue LED light inside cabinet indicates UV light is on. Bulb and Sleeve replacement is recommended every 10,000hrs,



Product Water Storage Tank

RO permeate water storage tank, made of superior materials and meeting the stringent standards of NSF 58. At the heart of the tank is a 100% butyl rubber diaphragm that has been post cured to eliminate any unwanted odors. Combined with a polypropylene liner it keeps system water contained in a sealed water chamber. A double gasketed stainless steel connection assures the integrity of the water treatment system.

Total Volume	14 Gallons
Total Capacity	10 Gallons
Dimensions	15.2" OD x 22.5" T
Connection Size	3/4" Stainless Steel MPT
Weight	24lbs
Max Operating Pressure	125 PSI

Features and Benefits:

- Steel construction
- Exceeds NSF and ANSI standards
- Polypropylene Liner
- Enhanced bottom dome
- Rugged Poly Base
- 100% Butyl Diaphragm



Dual Display PPM Controller

The dual display PPM controller allows for continuous and simultaneous monitoring and of the PPM levels on two different water lines (CITY & RO). The dual display controller also has a large, bright LED display as well as internal alarm that will sound if PPM level rises above user-set alarm levels for both lines. Isolated RO alarm contacts for BMS remote monitoring when RO membrane is exhausted.

Range	0 - 999 ppm
Accuracy	+/- 2%
Dimensions	3.7" x 3.7" x 4.9"
Power Supply	AC 110V
Weight	2lbs 1.1oz
Conversion Factor	NaCl (avg 0.5)

Features and Benefits:



- Simultaneous monitoring and control
- Exceeds NSF standards
- Large, bright LED display
- Internal audible alarm based on user set points
- Dry isolated RO & DI contacts for equipment relay control

John Guest LLDPE Tubing

The John Guest PE range of plastic tubing is produced in Linear Low Density Polyethylene for cold and intermittent hot water applications. The tubing provides the benefits of a wide range of temperature and pressure suitability, broad chemical compatibility and is made from non-contaminating materials. LLDPE is more robust than traditional low or medium density polyethylene and is recommended for use with cold and intermittent hot water. The tubing is made from FDA compliant materials and is NSF International certified.

Tube Tolerances	1/4" - 1/2" : +0.001/-0.004
Max Temperature	150°F
Tube Dimensions	1/4" OD - .170" ID
Weight	2lbs 1.1oz
Conversion Factor	NaCl (avg 0.5)

Internal Tubing Color Key		
Yellow	Incoming City	Black
Blue	Reverse Osmosis	Reject

John Guest "push-fit" Fittings

John Guest fittings are manufactured in gray and black acetal copolymer with RED safety clips attached to each fitting.

Standard Sizes	1/4" 3/8"
-----------------------	------------------

Diaphragm Pump - Standard

Weight	6 lbs
Dimensions	7.28" x 3.68" x 3.50"
Max Inlet Pressure	60psi
Max Water Temperature	170° F

Features and Benefits:



- FDA compliant materials
- Broad chemical compatibility
- Made from all non-contaminating materials
- Stronger than standard polyethylene tubing
- NSF International certified.



Features and Benefits:




- Push-fit technology
- Suitable for soft metal or plastic tubes
- Superior flow characteristics
- Quick disconnection without the need for tools

Features and Benefits:




- Increases Pressure 15-20psi
- 3 Chamber Diaphragm Pump
- Self Priming
- NSF Standard 58
- Increased Membrane Efficiency


TOP

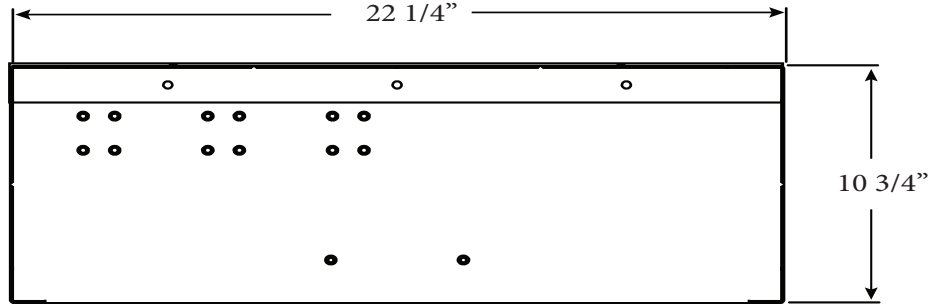

FRONT

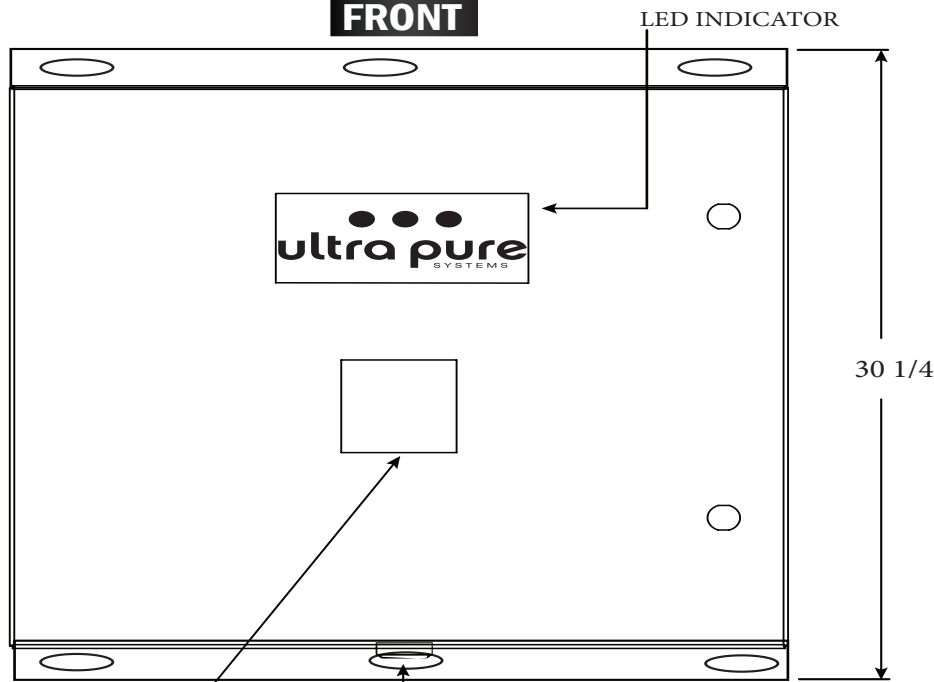

SIDE

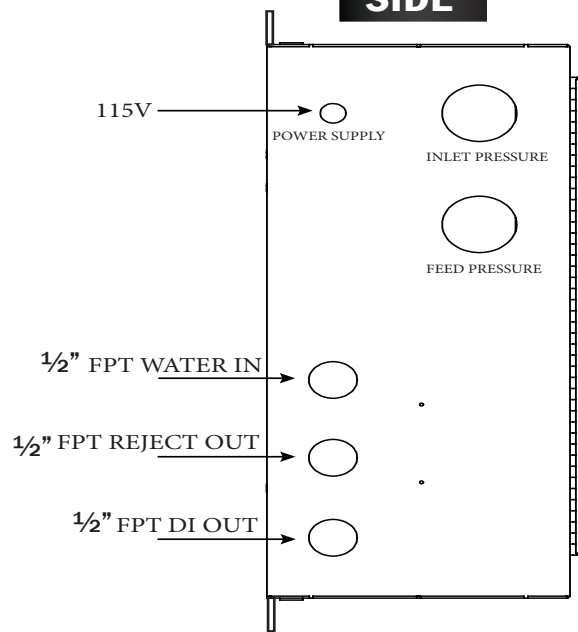

CITY/RO
PPM MONITOR

1/2" FPT Bulkhead to Drain
(Field Installed)



STORAGE TANK

